



Raster Link 5

Intuitive and user-friendly operation



1. Easy to follow icons enable intuitive and

Specifications

Type/Colour

Package size

Rolled media weight

Interface Power supply

Supplies

Sophisticated RIP Software maximizes performance





ES3 (C, M, Y, K, Lc, Lm) - SS21 (C, M, Y, K, Lc, Lm, Lk, Or) - BS3

Temperature: 20-30 °C (68-86 °F), Humidity: 35-65% Rh (Non

440ml lnk cartridge

2,000ml Ink pack

SB53-BL-44

SB53-M-44

SB53-Y-44

SB53-K-44

SB53-LBL-44

SB53-LM-44

SB53-BL-2I

SB53-M-2L

SB53-Y-2L

SB53-K-2L

SB53-DK-2L

SB53-LBL-2L

SB54-BLT-2L

SB54-MT-2L SB54-YT-2L

Magenta

Black

Deep Black

Light Blue

Light Magenta

Blue

Yellow

Deep Black

Light Blue

Blue

Yellow

Magenta



This facility enables easy program updates and profile downloading to be performed via the internet.

440ml Ink cartridge

440ml Ink cartridge

2,000ml Ink pack

600ml Ink pack

2.000ml lnk pack

SPC-0440C

SPC-0440M SPC-0440Y

SPC-0440K

SPC-0440LM

SPC-0501M

SPC-0501Y

SPC-0501K

SPC-0501LC

SPC-0501LM

SPC-05010r

SPC-0588C

SPC-0588M

SPC-0588Y

SPC-0588LC

SPC-0588Or

SPC-0667C

SPC-0667M

SPC-0667Y

SPC-0667K

SPC-0693C

SPC-0693M

SPC-0693Y

SPC-0693K

BS4-C-60

BS4-M-60

BS4-Y-60

RS4-K-60

BS4-C-2L

BS4-M-2L

BS4-K-2L

BS4-Y-2L

Magenta

Black

Light Cyan

Cyan Magenta

Yellow

Black

Light Cyan

Light Magenta

Orange

Light Black

Cyan

Yellow

Black

Light Cyan

Light Magenta Orange

Light Black Cvan

> Magenta Yellow

Black

Cyan

Black

Magenta

Black

Cyan

Yellow

Magenta

Supplies

		Supplie
JV150-130	JV150-160	Iter
On-demand piezo head		
360dpi, 540dpi, 720dpi, 1,080dpi, 1,440dpi		
1,361mm	1,610mm	
1,371mm	1,620mm	ES:
Solve M, Y, K, Lc, Lm) - SS21 (C, M, Y, I	nt ink K, Lc, Lm, Lk, Or) - BS3 / BS4 (C, M, Y, K)	
Water-based s Sb53 (BI, M, Y, K, DK, Lb		
ES3: 440ml I SS21: 440ml Ink car BS3 / BS4: 600ml Inl Sb53: 440ml Ink car Sb54: 2L	tridge / 2L Ink pack* s pack / 2L Ink pack* tridge / 2L Ink pack*	
1.0mm or less		
40kg or less		
VCCI class A / FCC class A / ETL UL 60950 CE Marking (EMC, Low voltage, and Machinery directive) / CB RoHS / REACH and Energy Star / RCM		SS2
USB 2.0, LAN for E-ma	ail notification function	
Single-phase (AC 100-120V / AC 220-240V±10%) 50/60Hz±1Hz		
100V: 1.44kW × 1 or less,	200V: 1.92kW × 1 or less	
perature: 20-30 °C (68-86 °F), Hu	midity: 35-65% Rh (Non condensing)	
mm × 700mm × 1,392mm	2,775mm × 700mm × 1,392mm	
160kg	185kg	
* Optiona	I MBIS (Mimaki Bulk Ink System) is required for using 2L Ink pack.	
SB53-BL-44		
SB53-M-44		BS
I	I I	i

• Some of the samples in this folder are artificial renderings • Specifications, design and dimensions stated in this folder may be subject to change without notice (for technical improvements, etc.)





www.mimakieurope.com info@mimakieurope.com @MimakiEurope





JV150-160

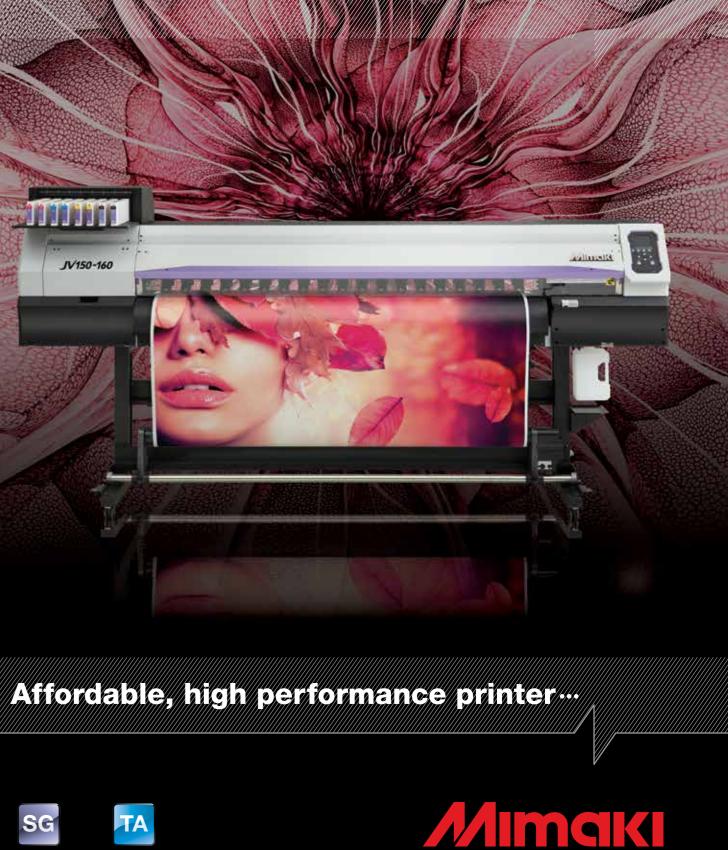





[•] The corporate and merchandise names written on this folder are the trademark of the respective corporations • Insight printing peads, also note that if using multiple printer units, colours could vary slightly from one unit to other unit due to slight individual differences • Compositor's errors reserved

Mimaki

ENGINEERING EXCELLENCE AND CREATIVE INNOVATION

Founded in Japan in 1975, Mimaki Engineering has steadily grown by reputation and influence into a global company with large operational bases in Asia and the Pacific, United States and Europe.

for the sign and graphics, textile and apparel and ndustrial markets. In addition, Mimaki also provides a comprehensive range of supporting products: hardware, software and associated consumable items, such as inks and cutting blades.

decoration and furnishing, from packaging and

· · · Mimaki delivers

Affordable, high-spec, high-performance printer

JV150 Series printer from Mimaki provides high performance, creativity and versatility with vibrant ink types, including new Orange and Light Black, in a cost effective package for signmakers, display graphics professionals and printshops.

JV150 series delivers ...

- Fast printing speeds up to 56.2m² per hour
- High quality print resolution of up to 1,440dpi
- Two different printing widths: 1,361mm and 1,610mm
- Choice of multiple eco-solvent and dye sub ink sets:
 - 8-colour options (SS21) featuring; Orange and Light Black
 - Vibrant 6-colour dye sub options (Sb53)
- Nozzle Check Unit (NCU) and Nozzle Recovery System (NRS) ensure continuous print operations
- UISS and optional MBIS on board 2 litre bulk ink system
- 3-way intelligent heater





Create ... Stickers, Decals, Labels, Signage, Vehicle graphics, Banners, Posters, PoS, Backlit & Exhibition graphics, Garment marking, Canvas prints and much more...


Productivity maintenance - NRS*1

The NRS substitutes defective nozzles with non-defective nozzles until the technician arrives. This feature enables uninterrupted print operations and continuous productivity.



Prevention, print quality problems - NCU*

The JV150 is equipped with Mimaki's original automatic NCU. Clogged nozzles are automatically detected and cleaned by the NCU. If the clogging is not resolved by cleaning, the JV150 automatically sets the nozzle recovery function NRS and resumes printing. These functions significantly reduce the waste printing caused by clogged nozzles during a continuous printing run.

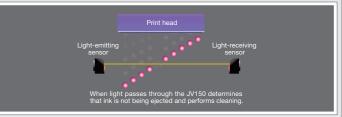


Uninterrupted Ink Supply System (UISS)

Utilises two cartridges per colour in 4-colour mode. When one cartridge runs out of ink the system switches automatically to the second cartridge of the same colour, enabling long


3-Way intelligent heater


A 3-way intelligent heater fixes droplets placed on media. By using Mimaki's original technology in heating the media at a controlled temperature, ink can be fixed while maintaining high colour development and high image quality. Thus the JV150 provides both steady colour development and easy handling after printing.

- Pre-heater: Heats media to the optimum temperatur before printing.
- Print heater: Dries ink after it lands on media before it bleeds, improving colour development.
- Post-heater: Enhances ink drying and achieves
- Top blower: Air blower supports drying of ink.



KEY TECHNICAL FEATURES · · ·

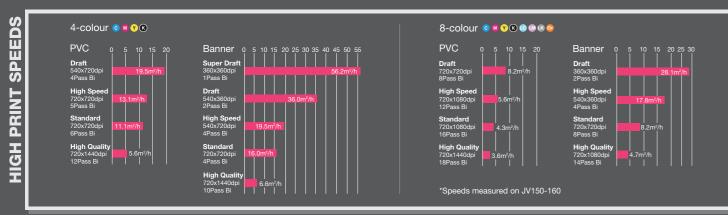

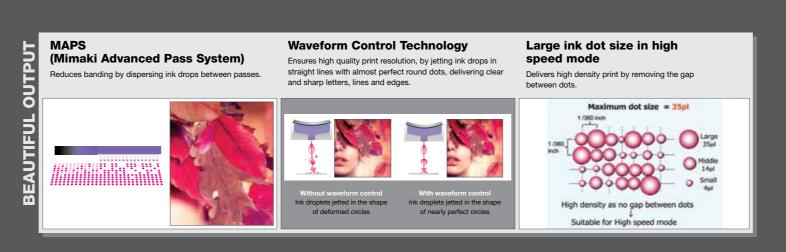

Orange Ink (faithful colour reproduction)

By using the orange ink as a process colour, 94.8% of the PANTONE colour chart is covered with approximate colours. Thanks to a wider gamut with the orange ink, food freshness can be



Light Black Ink (greater definition) The light black ink improves the printed grayscale gradation. It also faithfully represents

monochrome data without introducing unexpected colour shifts. Light black ink ensures a more



